


Keskiöporat DIN 332D

PERTIK

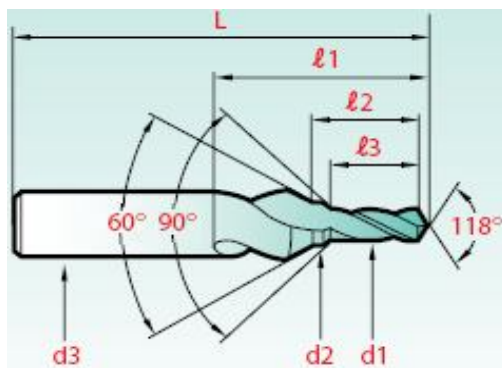

Lieriövarrella, HSS pikateräs

Ø	d1	d2	d3	L	l1	l2	l3
	mm	mm	mm	mm	mm	mm	mm
M3	2,5	3,2	6,0	55	18	9,0	8
M4	3,3	4,3	8,0	63	23	12,6	11
M5	4,2	5,3	10,0	67	27	15,1	13
M6	5,0	6,4	12,5	71	33	18,9	16
M8	6,8	8,4	14,0	88	41	23,0	19
M10	8,5	10,5	16,0	90	47	27,7	23
M12	10,2	13,0	20,0	105	59	34,5	28
M16	14,0	17,0	25,0	132	67	41,3	33
M20	17,5	21,0	31,5	145	77	48,3	38
M24	21,0	25,0	40,0	160	90	57,0	45

Varastoimme myös kartioartisia DIN 332D keskiöporia.

Muoto DS, lieriövarrella ja tasohionnalla kysyttäessä.