


Keskiöporat

DIN 333, muoto A - 60°

PERTIK

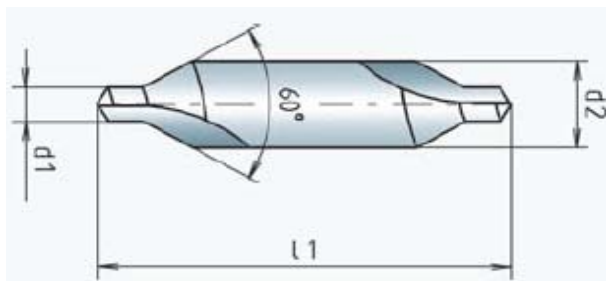

$\emptyset d_1$	$\emptyset d_2$	l_1	l	$\emptyset d_1$	$\emptyset d_2$	l_1	l
mm	mm	mm	mm	mm	mm	mm	mm
0,5	3,0	31	0.6 - 0.8	3,0	10,0	55	3.9 - 4.4
0,5	3,15	25	0.6 - 0.8	3,15	8,0	50	3.9 - 4.4
0,63	3,15	25	0.7 - 0.9	3,15	10,0	55	3.9 - 4.4
0,75	3,5	35	1.0 - 1.2	4,0	10,0	55	5.0 - 5.9
0,8	3,15	25	1.0 - 1.2	4,0	12,0	63	5.0 - 5.9
1,0	3,15	31	1.3 - 1.6	4,0	12,5	63	5.0 - 5.6
1,0	4,0	35	1.3 - 1.6	5,0	12,0	63	6.3 - 6.9
1,25	3,15	31	1.6 - 1.9	5,0	12,5	63	6.3 - 6.9
1,25	4,0	35	1.6 - 1.9	5,0	14,0	69	6.3 - 6.9
1,5	5,0	40	2.0 - 2.4	5,0	16,0	71	6.3 - 6.9
1,6	4,0	35	2.0 - 2.4	6,0	18,0	77	8.0 - 8.6
1,6	5,0	40	2.0 - 2.4	6,3	16,0	71	8.0 - 8.6
2,0	5,0	40	2.5 - 2.9	6,3	20,0	80	8.0 - 8.6
2,0	6,0	45	2.5 - 2.9	8,0	20,0	80	10.1 - 10.8
2,0	6,3	45	2.5 - 2.9	8,0	25,0	100	10.1 - 10.8
2,5	6,3	45	3.1 - 3.6	10,0	25,0	100	12.8 - 13.5
2,5	8,0	50	3.1 - 3.6	10,0	31,5	125	12.8 - 13.5
3,0	8,0	50	3.9 - 4.4	12,5	31,5	125	16.5 - 17.2