


Keskiöporat DIN 333, muoto R - säteellä

PERTIK

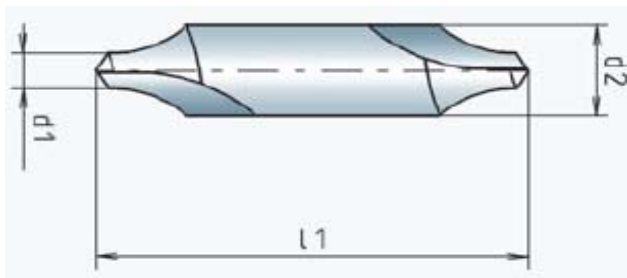

$\varnothing d_1$	$\varnothing d_2$	l_1	R	l	$\varnothing d_1$	$\varnothing d_2$	l_1	R	l
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
0,5	3,0	31	2,0	2.3 - 2.6	3,0	8,0	55	8,0	8.0 - 8.5
0,5	3,15	25	2,0	2.3 - 2.6	3,0	10,0	55	10,0	8.9 - 9.4
0,5	3,5	35	3,0	2.7 - 3.0	3,15	8,0	50	8,0	8.0 - 8.5
0,75	3,5	35	3,4	2.8 - 3.0	3,15	10,0	55	10,0	8.9 - 9.4
0,8	3,15	25	2,5	2.6 - 2.9	4,0	10,0	55	10,0	10.8 - 10.6
1,0	3,15	31	2,9	3.0 - 3.3	4,0	12,0	63	11,5	10.7 - 11.3
1,0	4,0	35	3,9	3.3 - 3.6	4,0	12,5	63	12,5	11.2 - 11.8
1,25	3,15	31	3,15	3.3 - 3.6	5,0	12,0	63	11,5	11.4 - 12.0
1,25	4,0	35	4,0	3.7 - 4.1	5,0	12,5	63	12,5	12.5 - 13.1
1,5	5,0	40	5,0	4.5 - 4.9	5,0	14,0	69	13,4	12.8 - 13.4
1,6	4,0	35	4,0	4.2 - 4.7	5,0	16,0	71	16,0	14.4 - 15.0
1,6	5,0	40	5,0	4.5 - 4.9	6,0	18,0	77	17,8	16.6 - 17.2
2,0	5,0	40	5,0	5.0 - 5.4	6,3	16,0	71	16,0	16.0 - 16.6
2,0	6,0	45	5,8	5.4 - 5.8	6,3	20,0	80	20,0	17.8 - 19.0
2,0	6,3	45	6,3	5.6 - 6.0	8,0	20,0	80	20,0	20.0 - 20.7
2,5	6,3	45	6,3	6.3 - 6.8	10,0	25,0	100	25,0	25.0 - 25.7
2,5	8,0	50	8,0	7.5 - 8.0	12,5	31,5	125	31,5	31.5 - 32.3