


CNC-alkureikäporat

PERTIK

HSS+5% Co

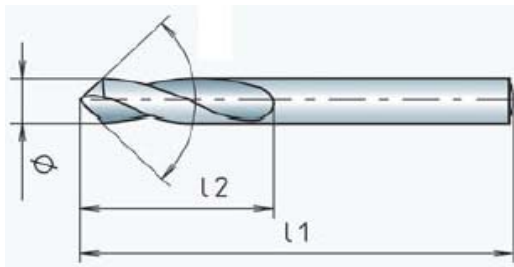


Ø D	l1	l2	90°	90°	120°	120°
mm	mm	mm	HSS+Co	TiAlN	HSS+Co	TiAlN
2,0	49	8	•	•	•	•
3,0	50	10	•	•	•	•
3,17 1/8"	50	10	•	•	•	•
4,0	52	12	•	•	•	•
4,8 3/16"	60	15	•	•	•	•
5,0	60	15	•	•	•	•
6,0	66	20	•	•	•	•
6,4 1/4"	66	22	•	•	•	•
8,0	79	25	•	•	•	•
9,5 3/8"	89	25	•	•	•	•
10,0	89	25	•	•	•	•
12,0	102	30	•	•	•	•
12,7 1/2"	102	35	•	•	•	•
14,0	115	35	•	•	•	•
15,9 5/8"	115	35	•	•	•	•
16,0	115	35	•	•	•	•
18,0	130	40	•	•	•	•
19,1 3/4"	131	40	•	•	•	•
20,0	131	40	•	•	•	•
25,0	138	45	•	•	•	•
25,4 1"	138	45	•	•	•	•

CNC-alkureikäporat

PERTIK

Täyskovametalli

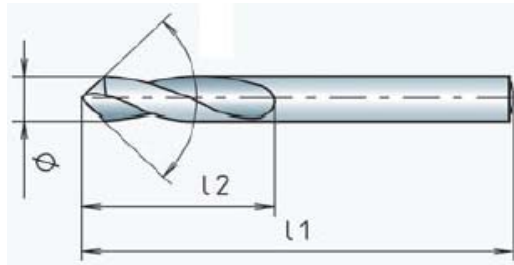

PG1600


Ø D		l1	l2	90°	120°
mm	tuuma	mm	mm		
2,0		40	8	•	•
3,0		45	10	•	•
4,0		50	12	•	•
5,0		50	15	•	•
6,0		50	18	•	•
6,35	1/4"	50	18	•	•
8,0		60	23	•	•
9,52	3/8"	70	24	•	•
10,0		70	24	•	•
12,0		70	24	•	•
12,70	1/2"	70	24	•	•
14,0		75	24	•	•
15,87	5/8"	80	26	•	•
16,0		80	26	•	•
20,0		100	35	•	•

Saatavana myös pinnoitettuna.

CNC-alkureikäporat

Pitkä malli, HSS+5% Co

PERTIK

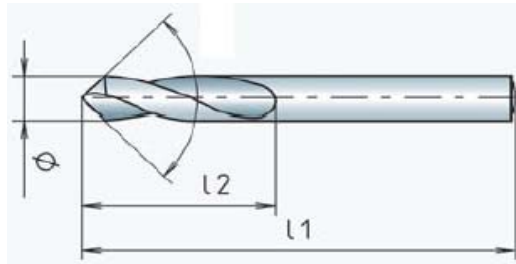


$\varnothing D$	l_1	l_2	90°	90°	120°	120°
mm	mm	mm	HSS+Co	TiAlN	HSS+Co	TiAlN
3,0	80	10	•		•	
4,0	100	12	•	•	•	•
5,0	120	15	•	•	•	•
6,0	140	20	•	•	•	•
6,35 1/4"	140	22	•	•	•	•
8,0	140	25	•	•	•	•
9,52 3/8"	170	25	•	•	•	•
10,0	170	25	•	•	•	•
12,0	170	30	•	•	•	•
12,70 1/2"	170	35	•	•	•	•
15,87 5/8"	200	35	•	•	•	•
16,0	200	35	•	•	•	•
19,05 3/4"	200	40	•	•	•	•
20,0	200	40	•	•	•	•
25,4 1"	200	45	•		•	

CNC-alkureikäporat

PERTIK

Pitkä malli, Täyskovametalli

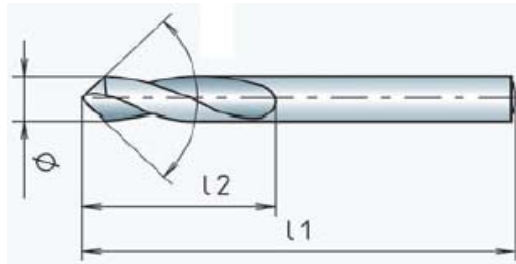

Ø D	l1	l2	90°	90°	120°	120°
mm	mm	mm	HSS+Co	TiAlN	HSS+Co	TiAlN
4,0	100	12	•		•	
5,0	120	15	•	•	•	•
6,0	140	20	•	•	•	•
6,35 1/4"	140	22	•	•	•	•
8,0	140	25	•	•	•	•
9,52 3/8"	170	25	•	•	•	•
10,0	170	25	•	•	•	•
12,0	170	30	•	•	•	•
12,70 1/2"	170	35	•	•	•	•
15,87 5/8"	200	35	•	•	•	•
16,0	200	35	•	•	•	•
19,05 3/4"	200	40	•	•	•	•
20,0	200	40	•	•	•	•