


HSS-E COBALT

DIN 208-B • NFE 66015

D H7 inches	D H7 mm	L	ℓ1	ℓ2	MORSE Nº	magafor 660
	4,0	129	19	63	1	€ •
	5,0	133	23	67	1	•
	6,0	138	28	72	1	•
6,35 (1/4")	6,5	144	28	78	1	•
	7,0 - 7,5	150	28	84	1	•
7,937 (5/16")	8,0 - 8,5	156	33	90	1	•
	9,0 - 9,5	162	36	96	1	•
9,525 (3/8")	10,0 - 10,5	168	38	102	1	•
11,112 (7/16")	11,0 - 11,5	175	41	109	1	•
	12,0	182	44	116	1	•
12,7 (1/2")	12,5 - 13,0	182	44	116	1	•
	13,5 - 14,0	189	47	123	1	•
14,287 (9/16")	14,5 - 15,0	204	50	124	2	•
15,875 (5/8")	15,5 - 16,0	210	52	130	2	•
	16,5 - 17,0	214	54	134	2	•
	17,5 - 18,0	219	56	139	2	•
19,05 (3/4")	18,5 - 19,0	223	58	143	2	•
	19,5 - 20,0	228	60	148	2	•
	20,5 - 21,0	232	62	152	2	•
	21,5 - 22,0	237	64	157	2	•
22,225 (7/8")	22,5 - 23,0	241	66	161	2	•
	24 - 25	268	68	168	3	•
25,4 (1")	26	273	70	173	3	•
	27 - 28	277	71	177	3	•
28,575 (1" - 1/8)	29 - 30 - 31	281	73	181	3	•
31,75 (1" - 1/4)	32 - 33	317	77	193	4	•
34,925 (1" - 3/8)	34 - 35	321	78	197	4	•
	36 - 37	325	79	201	4	•
38,1 (1" - 1/2)	38 - 39 - 40	329	81	205	4	•
41,275 (1" - 5/8)	41 - 42	333	82	209	4	•
	43 - 44 - 45	336	83	212	4	•
47,625 (1" - 7/8)	46 - 47	340	84	216	4	•
	48 - 49 - 50	344	86	220	4	•
	55	344	86	220	4	•
	60	344	86	220	4	•

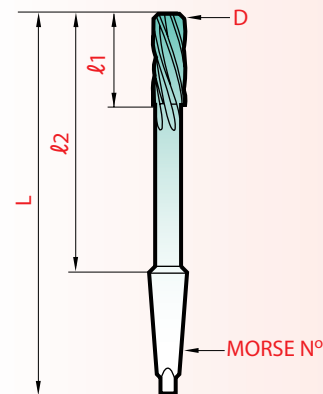


D	ℓ1	L
m5	+1	± 1

Tolerancias generales / General tolerances

Número de dientes / Flute number

z	Ø
6	4,0 - 12,5
8	12,7 - 25,0
10	25,4 - 38,1
12	39,0 - 60,0



Para todas las dimensiones no tarifadas
o tolerancias especiales:
Servicio Urgente 48 horas.

Página / Page 101

For any dimension not on the list
or for special tolerances:
Emergency 48-hour Service.